

## B-342 PermaSleeve® 3PS Polyolefin Wire Marking Sleeves:

Double-Sided Printable, 2" Sleeve Width (Continued from previous page.)

Part Number	Sleeves Per Roll	Pieces Per Roll	Approx. Wire Gauge	Range of Wire Diameter Inch (mm) Min. Max.	Supplied Diameter Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeve Width Inch (mm)	Rec. Printer	Rec. Ribbon
3PS-500-2-WT	500	500	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) ± .003 (0.07)	2.000 (50.8)	PR Plus, BBP72, IP	R4300/ R6602
3PS-500-2-WT-*	500	--	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) ± .003 (0.07)	--	PR Plus, BBP72, IP	R4300/ R6602
3PS-500-2-WT-S	250	250	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) ± .003 (0.07)	2.000 (50.8)	PR Plus, BBP72, IP	R4300/ R6602
3PS-500-2-WT-S-*	250	--	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) ± .003 (0.07)	--	PR Plus, BBP72, IP	R4300/ R6602
3PS-500-2-*S	250	250	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) ± .003 (0.07)	2.000 (50.8)	PR Plus, BBP72, IP	R4300/ R6602
3PS-500-2-*S-*	250	--	8 to 1	0.187 (4.8) - 0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) ± .003 (0.07)	--	PR Plus, BBP72, IP	R4300/ R6602
3PS-750-2-WT	250	250	6 to 4/0	0.250 (6.6) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) ± .003 (0.07)	2.000 (50.8)	PR Plus, BBP72, IP	R4300/ R6602
3PS-750-2-WT-*	250	--	6 to 4/0	0.250 (6.6) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) ± .003 (0.07)	--	PR Plus, BBP72, IP	R4300/ R6602
3PS-750-2-WT-S	100	100	6 to 4/0	0.250 (6.6) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) ± .003 (0.07)	2.000 (50.8)	PR Plus, BBP72, IP	R4300/ R6602
3PS-750-2-WT-S-*	100	--	6 to 4/0	0.250 (6.6) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) ± .003 (0.07)	--	PR Plus, BBP72, IP	R4300/ R6602
3PS-750-2-*S	100	100	6 to 4/0	0.250 (6.6) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) ± .003 (0.07)	2.000 (50.8)	PR Plus, BBP72, IP	R4300/ R6602
3PS-750-2-*S-*	100	--	6 to 4/0	0.250 (6.6) - 0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) ± .003 (0.07)	--	PR Plus, BBP72, IP	R4300/ R6602
3PS-1000-2-WT	250	250	2 to 0.950 dia.	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) ± .003 (0.07)	2.000 (50.8)	PR Plus, BBP72, IP	R4300/ R6602
3PS-1000-2-WT-*	250	--	2 to 0.950 dia.	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) ± .003 (0.07)	--	PR Plus, BBP72, IP	R4300/ R6602
3PS-1000-2-WT-S	100	100	2 to 0.950 dia.	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) ± .003 (0.07)	2.000 (50.8)	PR Plus, BBP72, IP	R4300/ R6602
3PS-1000-2-WT-S-*	100	--	2 to 0.950 dia.	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) ± .003 (0.07)	--	PR Plus, BBP72, IP	R4300/ R6602
3PS-1000-2-*S	100	100	2 to 0.950 dia.	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) ± .003 (0.07)	2.000 (50.8)	PR Plus, BBP72, IP	R4300/ R6602
3PS-1000-2-*S-*	100	--	2 to 0.950 dia.	0.333 (8.5) - 0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) ± .003 (0.07)	--	PR Plus, BBP72, IP	R4300/ R6602
3PS-1500-2-WT	250	250	N/A	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) ± .003 (0.07)	2.000 (50.8)	PR Plus, BBP72, IP	R4300/ R6602
3PS-1500-2-WT-*	250	--	N/A	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) ± .003 (0.07)	--	PR Plus, BBP72, IP	R4300/ R6602
3PS-1500-2-WT-S	100	100	N/A	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) ± .003 (0.07)	2.000 (50.8)	PR Plus, BBP72, IP	R4300/ R6602
3PS-1500-2-WT-S-*	100	--	N/A	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) ± .003 (0.07)	--	PR Plus, BBP72, IP	R4300/ R6602
3PS-1500-2-*S	100	100	N/A	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) ± .003 (0.07)	2.000 (50.8)	PR Plus, BBP72, IP	R4300/ R6602
3PS-1500-2-*S-*	100	--	N/A	0.500 (12.7) - 1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) ± .003 (0.07)	--	PR Plus, BBP72, IP	R4300/ R6602

**\*Choosing Your PermaSleeve Color**

You may also choose to order your PermaSleeves 3PS 2" width sleeves in the colors listed below. Replace the singular asterisk (\*) with the abbreviation of the desired color.

Example: 3PS-094-2-\*S becomes 3PS-094-2-YL-S

**Available Stock Colors:**

BK = Black	GR = Green	PK = Pink	YL = Yellow
BL = Blue	GY = Gray	RD = Red	WT = White
BR = Brown	OR = Orange	VT = Violet	


**\*\* Choosing Your PermaSleeve Pieces (optional):**

While 1 marker per sleeve is standard, you may also choose to have each sleeve slit multiple times to produce multiple pieces. Replace the double asterisks (\*\*) in the part number to fill in your desired pieces per marker.

Example: 3PS-187-2-WT-S-\*\* becomes 3PS-187-2-WT-S-4

This "4" means that this 2.000" sleeve is slit into four 0.500" pieces.

<b>Standard Option:</b> 1 marker per sleeve	<b>Other Available Slit Options:</b> (Contact Brady Customer Service for availability) 2, 3 or 4 markers per sleeve
--	---

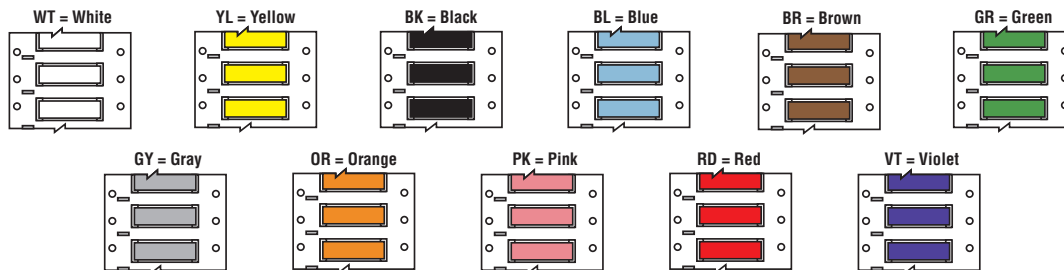

**Did You Know? BBP®11 PermaSleeve Wire Marking Sleeves**

Brady also offers a variety of wire marking sleeves on a 1" small core roll specifically designed to be printed with the BBP®11 Label Printer.

To view all BBP®11 PermaSleeve Wire Marking Sleeves, view page 73 or visit [www.BradyID.com](http://www.BradyID.com)



See all benchtop printer ribbon parts on page 152 and full material descriptions on pages 164-170.

Approx. wire gauge based on AWG for THHN wire.